



Model AM-III

Portable Moisture Meter for the Paper Industry

- ▶ Field selection of up to 11 Calibration Curves Pairs
- ▶ Measures 0 to 15 percent Moisture Range
- ▶ Heavy Gauge Stainless Steel Rollers
- ▶ Double Sealed Precision Bearings
- ▶ Recessed Digital LED Display calibrated directly in percent moisture
- ▶ Internal electrical standard assures calibration accuracy
- ▶ Lead Acid Gel Rechargeable Battery
- ▶ Calibrations programmed in microcontroller
- ▶ Complete with Automatic Battery Charger and Carrying Case

The Model AM-III Portable Moisture Meter is a microcontroller-based instrument that permits instantaneous nondestructive moisture measurement on all types of paper and paperboard.

Immediate, accurate moisture readings are obtained on moving or stationary rolls, stacks, or reams. The paper industry has long recognized the need for rapid on-line moisture measurement to assure efficient energy usage and a high yield of good quality paper. Many years of experience in the measuring of paper moistures have qualified Aqua Measure's engineers to build a rugged, portable instrument which truly excels in measurement accuracy.




List of Calibrations

bleached sulfite board · bonds
· corrugating medium · creped wadding · disposable diapers · envelope stock · fiber mat · glassine · hardboard · jute · kraft · liner board · newsprint · particle board (1/2" thick) · pulp sheets · roofing paper · sheet plastics (PVC and acrylic) · tissue · tobacco paper · toweling · tube sock · waxed release paper



AQUA
 Measure Instrument Co.
 Moisture Register Products Division

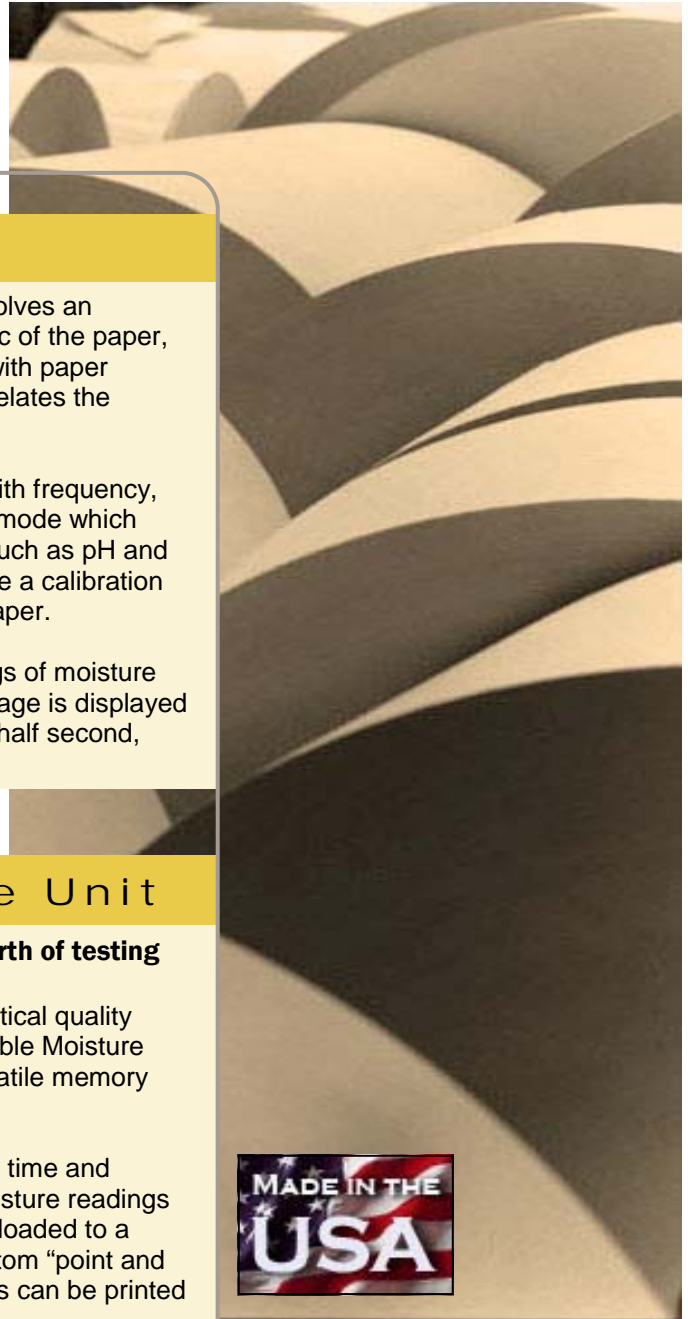

▶ **Model AM-III**

The measurement technique employed in the AM-III involves an electronic determination of a basic physical characteristic of the paper, the dielectric constant. This physical property changes with paper moisture, therefore, a calibration can be defined which relates the measured dielectric constant to moisture content.

The character of the dielectric response also changes with frequency, hence it is possible to select a frequency and operating mode which minimizes the influence of other variables in the paper such as pH and temperature. The AM-III employs this principle to achieve a calibration which can be used with good accuracy for all types of paper.


To assure highest measurement accuracy, eight readings of moisture content are taken in the machine direction, and the average is displayed as one moisture reading. A new average is taken every half second, providing an easily read display rate.

▶ **Optional Data Storage Unit**

Stores 2,000 Moisture Readings · 30 minutes worth of testing

The Data Storage Unit (DSU) is a powerful tool for statistical quality control data when integrated into the Model AM-III Portable Moisture Meter. The DSU incorporates a real-time clock, non-volatile memory and an RS-232 Input/Output link to a computer.

When the AM-III is turned on, the DSU records the date, time and Calibration Curve Switch Position that is in use. The moisture readings are then recorded at a rate of one per second and downloaded to a program that saves the measurements as files. The custom "point and click" software then displays the files as graphs. The files can be printed or imported into a spreadsheet program for further processing and for future reference.

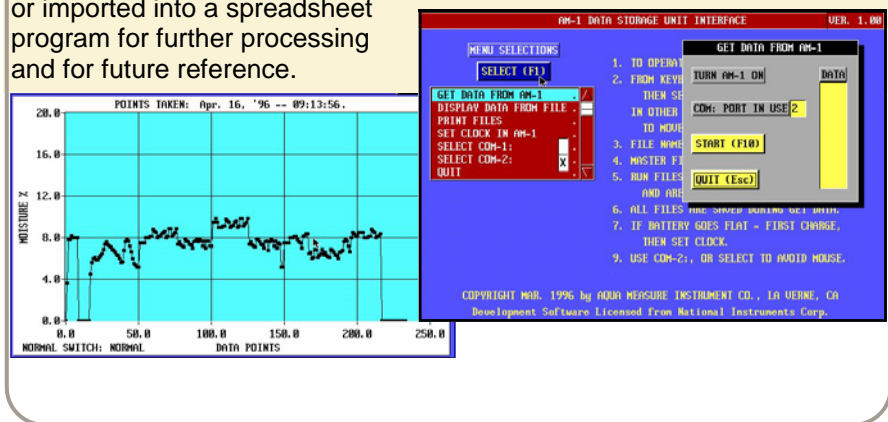

**AQUA MEASURE
 INSTRUMENT CO.**

1712 EARTHART COURT
 LA VERNE, CALIFORNIA 91750

Phone: 909.392.5836
 Toll Free: 800.966.4788
 Fax: 909.392.5838
 Email: sales@aquameasure.com

www.moistureregisterproducts.com